


ElectroChlor Technical Specifications

Model	Input Watt kW (max)	Output current DC amp (max)	Chlorine production gram/hour	Max Pool Capacity Climate	
				< 26° C	> 26° C
25A / 25A SC	0.3125	25	25	150,000 litres	102,500 litres
30A / 30A SC	0.3750	30	30	180,000 litres	125,000 litres


	25A / 25A SC	30A / 30A SC
Primary input volts	220-240 VAC 50/60 Hz	220-240 VAC 50/60 Hz
Input power	330W	380W
Max. total current	10A	10A
Pump outlet max.	8A	8A
Cell volts	6-8V	6-8V
Degr. of protection to AS1939	IP23	IP23

- All units are equipped with a 3 amp self-resetting fuse.
- Pool capacity is based on a stabilised swimming pool with a minimum salt level of 5,000 ppm.

ElectroChlor Power Pack Dimensions

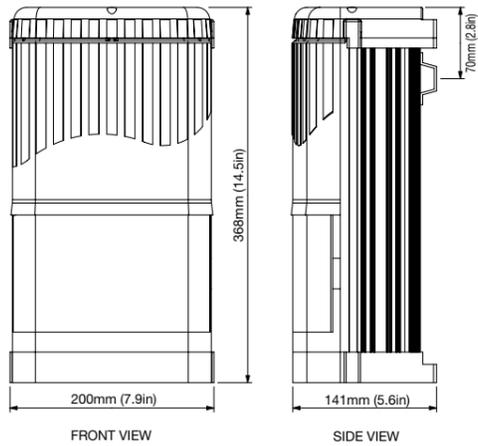


ElectroChlor Self Clean Cell Dimensions

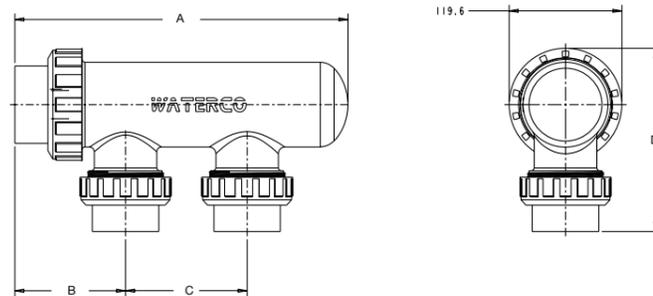

Model	A	B	C	D
30 SC	423.5mm	136.5mm	280mm	188.8mm
25 SC	353.5mm	117.5mm	129mm	194.3mm

ElectroChlor Standard Cell Dimensions

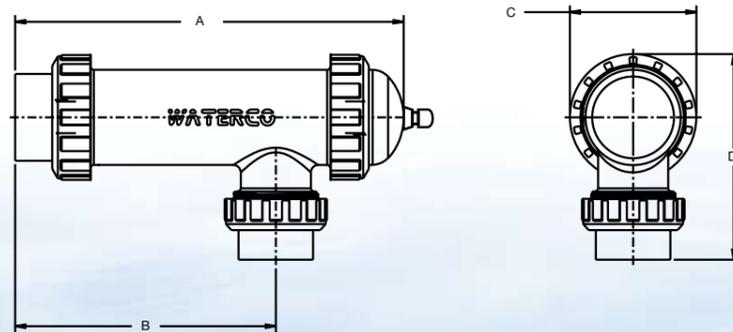

Model	A	B	C	D
25A / 30A	385mm	275mm	96mm	163mm

These chlorinators are approved and conformed to AS3136 Swimming Pool Equipment, as a prescribed article under Australian Registration. These chlorinators conform to the Australian Electromagnetic Compatibility Standard marked by the C-tick.

OFFICES - AUSTRALIA
 NSW - Sydney (Head Office)
 Tel: +61 2 9898 8600
 QLD - Brisbane
 Tel: +61 7 3299 9900
 VIC/TAS - Melbourne
 Tel: +61 3 9764 1211
 WA - Perth
 Tel: +61 8 9273 1900
 SA/NT - Adelaide
 Tel: +61 8 8244 6000
 ACT Distribution
 Tel: +61 2 6280 6476

OFFICES - OVERSEAS
 Waterco (Europe) Limited
 Radfield, Kent, UK
 Tel: +44 (0) 1795 521 733
 Waterco (USA) Inc
 Augusta, Georgia, USA
 Tel: +1 706 793 7291
 Waterco Canada
 St Hyacinthe, Quebec, Canada
 Tel: +1 450 796 1421
 Waterco (NZ) Limited
 Auckland, New Zealand
 Tel: +64 9 525 7570

Waterco (GZ) Limited
 Guangzhou, China
 Tel: +86 20 3222 2180
 Waterco (Far East) Sdn Bhd
 Selangor, Malaysia
 Tel: +60 3 6145 6000
 PT Waterco Indonesia
 Jakarta, Indonesia
 Tel: +62 21 4585 1481

DISTRIBUTED BY:

WATERCO
 Water, the liquid of life



ZZE1283 1/08

ELECTROCHLOR LCD



Simple and effective salt water chlorination



Electrochlor automatically generates chlorine to keep your swimming pool clean and healthy.

- Large LCD display
- In built pool monitor and pump protection
- Precision chlorine production controls
- Super Chlorination function
- High performance titanium electrolytic cell
- Self cleaning electrolytic cell (optional)
- 4 bar pressure rated salt cell housing



*conditions apply

WATERCO
 Water, the liquid of life

www.waterco.com

ElectroChlor Salt Water Chlorinator

The ElectroChlor will automatically maintain the chlorine level of your pool and eliminate problems associated with periods of very high or low chlorine levels. Fewer fluctuations in chlorine levels mean fewer fluctuations in pH levels. This adds up to more stable, balanced water.

Consistently maintained sanitizer levels in the pool water will prevent the growth of all common algae. A salt-water chlorinated pool requires much less attention than a chlorine pool.

A salt water pool provides a more comfortable swimming environment. Salt water feels better and is less irritating to the body than standard chlorinated water. The amount of salt required, varies from 4000ppm to 6500ppm. In comparison, a teardrop is about 7,200 ppm and ocean water is about 36,000 ppm.

Chlorine generation

A small amount of natural salt is dissolved into the pool water. As the pool water flows through the electrolytic cell, electrolysis separates the salt water into its basic components, sodium and chloride. Pure chlorine gas is produced by this process and goes to work in the pool. Following this process the chloride and sodium re-bond and become natural salt again.

The ElectroChlor is plumbed directly in-line with the pool equipment, typically after the heater.

ElectroChlor


ElectroChlor consists of a Power Pack (to supply power to the cell) and Salt Cell (where the chlorine is produced).

ElectroChlor Power Pack

The Power Pack monitors and controls chlorine production by regulating the amount of electrical energy supplied to the salt cell.



ElectroChlor LCD Power pack is only available with Self Clean Models.

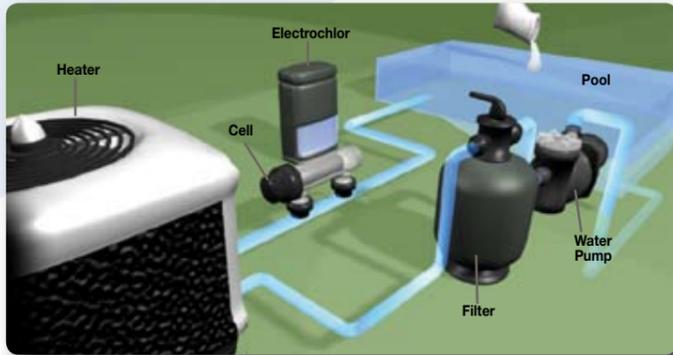

In built pool monitor

ElectroChlor's power pack has an inbuilt:

- Salt level indicator
- Chlorine production indicator
- Backwash indicator

Pump protection

If not water flow is detected in the salt cell, ElectroChlor automatically switches off the pump to prevent any damage to the pump and pool equipment. Indicators will start blinking on the LCD panel to alert the pool owner, until the fault is rectified.

Advanced programming

Programme the chlorinator timer to turn on or off at any time that suits your lifestyle. 7 Day timer allows for settings on week days, week ends, any day or every day operation. 3 program settings are available.

You can program the ElectroChlor for extra chlorination during the weekends and less chlorination during weekdays.

Polarity Reversal – Self Clean

To change polarity simply press the PROGRAM key until the timer blinks then press the SET key and it will change the polarity. This feature is only to be used to check the chlorinator cell's condition.

Battery Back Up



A Battery back up is incorporated to save your settings in the event of a power failure. A battery link is provided to maximise battery life.

ElectroChlor is also available with an electro mechanical timer. LCD display and Advanced programming options are not available on the electro mechanical model.

ElectroChlor Salt Cell

The ElectroChlor's salt cell consists of a series of titanium electrodes with opposite charges. ElectroChlor's clear salt cell housing allows visual inspection of the salt cell plates and enables monitoring of chlorine production.

The cell housing is constructed using clear U.V. stabilized acrylic. Both anode and cathode of the self-clean chlorinator are made from uniquely coated titanium mesh to add extra durability and life.

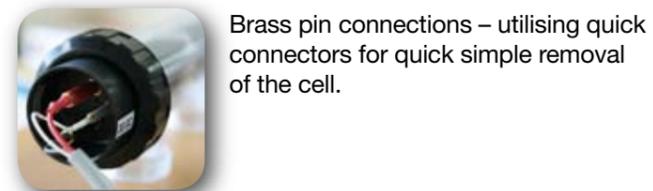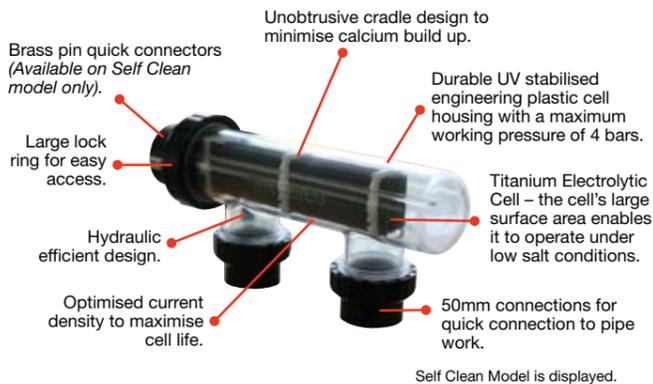

Maintenance

ElectroChlor Self Clean Salt Cell has the added ability to reverse the polarity of the voltage to clean calcium buildup off its electrodes.

Salt Levels

Once an ElectroChlor is installed and the desirable salt level is achieved (see table), salt needs only to be added occasionally to replace any water loss e.g. splash out, evaporation, backwashing.

Salt levels		
Minimum = 4000 ppm	Optimum = 6000 ppm	Maximum = 6500 ppm

Note: Low salt levels will lead to low chlorine production.

Five Year Warranty

ElectroChlor is covered by a 5 year (2 + 3 year pro rata) warranty period against faulty materials and workmanship. 1 year warranty for commercial installations. Please refer to the detailed warranty booklet provided.

Frequently Asked Questions

Is there a difference between 'salt chlorinator' chlorine and 'normal' chlorine?

A salt chlorinator makes chlorine the same way a chlorine factory does. The difference is that it is manufactured in your pool. Liquid chlorine is approximately 12.5% pure, whereas ElectroChlor's chlorine is 100% pure.

Will I ever need to add standard pool chlorine again?

From time to time it may become necessary to add some chlorine to the pool. This may be due to heavy rain or if the chlorine level needs to be shocked back up.

Does the salt damage pool equipment?

No. Low levels of salt have relatively insignificant corrosive effects on pool fittings and equipment.

How do I get started?

It's easy! After installing your salt chlorinator, you simply add the recommended amount of salt to your pool and choose your desired chlorine level.

How much salt will I need?

1 kg of salt in 1,000 litres of water raises the salt level by 1000ppm. Therefore, 420 kgs of salt will raise a 70,000 litre pool from 0 ppm to 6,000 ppm.

What type of salt should I use?

High purity salt, it is important that the salt does not contain additives. Any common salt (like table salt) usually has an additive that may have staining properties.

